


8 Ports Gigabit PoE Ethernet Switch User Manual

The 8 Port / 4 PoE Ethernet Switch is fully integrated to support security monitoring, provides fast packet forwarding capability, as well as Gigabit Ethernet transfer rates by utilizing the appropriate bandwidth to ensure clear images/smooth transmission and enough bandwidth for high-definition video.

Application

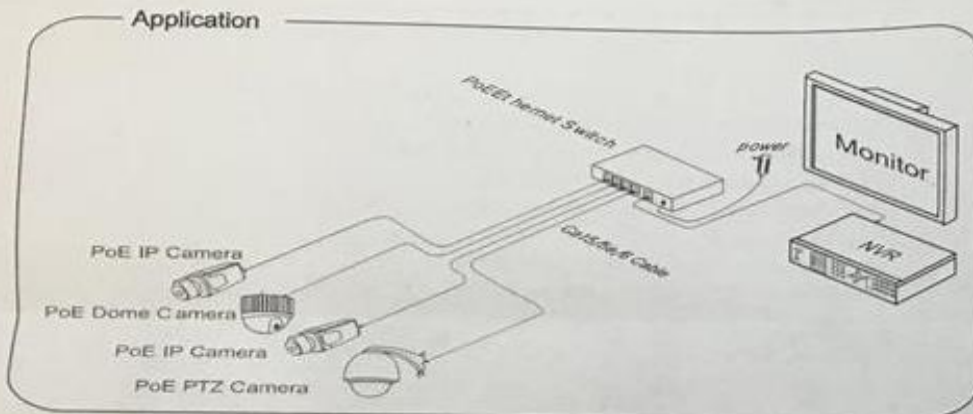

Feature

- Conforms to IEEE802.3, IEEE 802.3u, IEEE 802.3af, IEEE 802.3at
- Provides 8 10/100/1000Base-TX ports
- Provides 4 PoE injector and 60W power adapter
- High back-plane bandwidth 16 Gbps
- IEEE802.3x Flow control



Notice


The transmission distance is related to the connected cable. We suggest standard Cat5e / 6 network cable and quality of camera so the transmission distance can up to furthest

Board Diagram


8 Port Gigabit PoE Ethernet Switch

Front board

GS1008P+

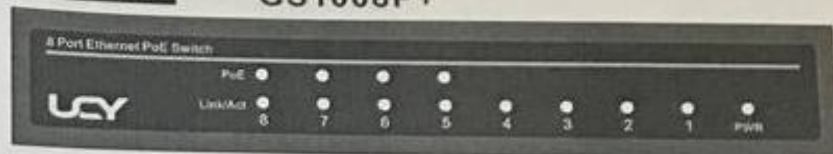

Back board

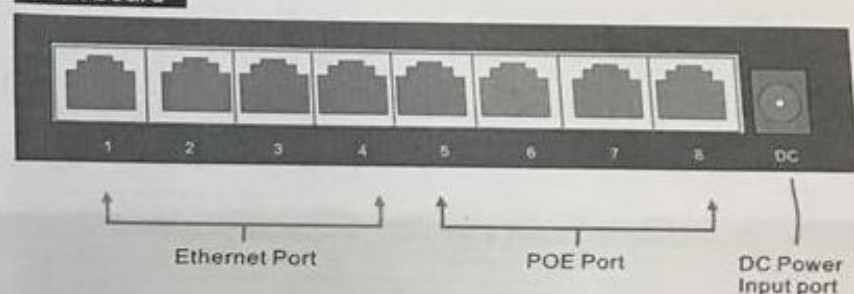

Installation steps

Please check the following items before installation, if it is missing, please contact the dealer.

- | | |
|------------------------------------|-----|
| ● 8 Port/4 PoE Ethernet PoE Switch | 1pc |
| ● Power adaptor | 1pc |
| ● AC power cable | 1pc |
| ● User manual | 1pc |

Please follow the below installation steps

- 1) Please turn off the signal power and display device power before installation, installation with power will damage the transmission equipment;
- 2) Use network cable connect PoE IP camera and 5~8 downlink ports of product respectively
- 3) Use a network cable connect equipment up link port and NVR or computer;
- 4) Connect AC power cable;
- 5) Check if the installation is correct equipment is in good condition the connection is stable then provide power for system;
- 6) Ensure the Ethernet equipment with power and work properly.

Specification

	Item		Description
Power	Power supply		External power supply
	Voltage Range		DC 48~54V
	Consumption		<5W
Ethernet	Speed		1~8 Port : 10/100/1000Mbps
	Transmission Distance		100Meter (328ft)
Network Switch	Ethernet Standard		IEEE 802.3x IEEE 802.3u 802.3ab 802.3af/at
	Switching capacity		16G
	Transfer Rate	14,880pps for 10Mbps	
		148,800pps for 100Mbps	
		1,488,000pps for 1000Mbps	
	MAC Address		2K MAC address table
LINK/ACT	On	Green	The port is connecting
	Blinks	-	The port is receiving or transmitting data
	Off	-	The port is not linked successfully with the device
POE (12.36)	On	Green	PD is connected
	Off	-	No PD is connected or power forwarding fails
	Capacity		55W
Environment	Temperature		0~40°C
	Storage		-40~70°C
Mechanical	Dimension		138mm x 79mm x 25mm
	Color		Black

Specification change will not be noticed

Trouble Shooting

Please follow the steps if the equipment has trouble.

- Make sure the equipment is installed according to the manufactures installation guide.
- Confirm RJ45 cable order meets EIA/TIA568A or 568B standard.
- Every PoE port can provide PoE equipment maximum power less than 30W, please do not connect the PoE equipment with power over 30W.
- Replace the equipment with a proper functioning 8 ports PoE Ethernet Switch to check if the equipment is damaged.
- Please contact your vendor if trouble still exists.

Plug Producing Method

Instruments to be used, wire crimper network tester, Wire sequence of RJ45 plug should conform with EIA/TIA568A or 568B.

- 1 Please remove 2cm long the insulating layer and bare 8 pairs UTP cable
- 2 Separate the 8 pairs UTP cable and straighten them
- 3 Line up the 8 pieces of cables per EIA TIA 568A or 568B
- 4 Cut off the cables to leave 1.5cm bare wire
- 5 Plug 8 cables into RJ45 plug make sure each cable is in each pin
- 6 Use the wire crimper to crimp it
- 7 Repeat above 9 steps to make the another end
- 8 Use network tester to test the cable if it works

Pin	Color
1	White/Green
2	Green
3	White/Orange
4	Blue
5	White/Blue
6	Orange
7	White/Brown
8	Brown



EIA/TIA 568A

Pin	Color
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown



EIA/TIA 568B



Notice

When choose RJ45 make sure if one end is EIA/TIA568A,the other end should also be EIA/TIA568A,
When choose RJ45 make sure if one end is EIA/TIA568B,the other end should also be EIA/TIA568B,